



Предохранители

31

fine fuses.....	864
screw locks.....	867
thermal fuses.....	867
micro fuses.....	867
HV fuses.....	868
overload switches.....	868
line circuit breakers.....	868



предохранители

fine fuses



fig.	description
1 401030	ø5x20mm - fast-acting - 250V - 120 pieces 10x 100mA, 160mA, 250mA, 500mA, 630mA, 800mA, 1A, 1.6A, 2A, 2.5A, 4A, 6.3A each
1 401032	ø5x20mm - medium lag - 250V - 120 pieces 10x 100mA, 160mA, 250mA, 500mA, 630mA, 800mA, 1A, 1.6A, 2.5A, 4A, 6.3A, 10A each
1 401034	ø5x20mm - slow-acting - 250V - 120 pieces 10x 100mA, 160mA, 250mA, 500mA, 630mA, 800mA, 1A, 1.6A, 2.5A, 4A, 6.3A, 10A each
1 401036	ø5x30mm - fast-acting - 250V - 120 pieces 10x 315mA, 500mA, 800mA, 1A, 1.25A, 1.6A, 2A, 2.5A, 3.15A, 4A, 6.3A, 10A each
1 401037	ø5x30mm - medium lag - 250V - 120 pieces 10x 315mA, 500mA, 800mA, 1A, 1.25A, 1.6A, 2A, 2.5A, 3.15A, 4A, 6.3A, 10A each
1 401038	ø6.3x32mm - fast-acting - 250V - 120 pieces 10x 315mA, 500mA, 800mA, 1A, 1.25A, 1.6A, 2A, 2.5A, 3.15A, 4A, 5A, 6.3A each
1 401039	ø6.3x32mm - medium lag - 250V - 120 pieces 10x 315mA, 500mA, 800mA, 1A, 1.25A, 1.6A, 2A, 2.5A, 3.15A, 4A, 5A, 6.3A each
1 401040	ø6.3x32mm - slow-acting - 250V - 120 pieces 10x 315mA, 500mA, 800mA, 1A, 1.25A, 1.6A, 2A, 2.5A, 3.15A, 4A, 5A, 6.3A each
2 401031	ø5x20mm - fast-acting - 250V - 360 pieces 20x 100mA, 125mA, 160mA, 200mA, 250mA, 315mA, 400mA, 500mA, 630mA, 0.8A, 1.0A, 1.25A, 1.6A, 2A, 2.5A, 3.15A, 4A, 6.3A each
2 401033	ø5x20mm - medium lag - 250V - 360 pieces 20x 100mA, 125mA, 160mA, 200mA, 250mA, 315mA, 400mA, 500mA, 630mA, 0.8A, 1.0A, 1.25A, 1.6A, 2A, 2.5A, 3.15A, 4A, 6.3A each
2 401035	ø5x20mm - slow-acting - 250V - 360 pieces 20x 100mA, 125mA, 160mA, 200mA, 250mA, 315mA, 400mA, 500mA, 630mA, 0.8A, 1.0A, 1.25A, 1.6A, 2A, 2.5A, 3.15A, 4A, 6.3A each

pos.	curr. (A)	pos.	curr. (A)
1 358661	0.1	9 358669	0.63
2 358662	0.125	10 358530	0.8
3 358663	0.16	11 358671	1
4 358664	0.2	12 358531	1.25
5 358665	0.25	13 358673	1.6
6 358666	0.32	14 358532	2
7 358667	0.4	15 358675	2.5
8 358668	0.5	16 358676	3.15

technical data:
size ø5x20mm
rated voltage 250V
switch-off behavior fast-acting
quantity 10 pcs

pos.	curr. (A)	pos.	curr. (A)
17 358677	4	20 358678	8
18 358074	5	21 358610	10
19 358533	6.3	22 358611	16

pos.	curr. (A)	pos.	curr. (A)	pos.	curr. (A)
1 358680	0.1	9 358688	0.63	17 358696	4
2 358681	0.13	10 358689	0.8	18 358700	5
3 358682	0.16	11 358690	1	19 358697	6.3
4 358683	0.2	12 358691	1.25	20 358698	8
5 358684	0.25	13 358692	1.6	21 358699	10
6 358685	0.32	14 358693	2	22 358705	16
7 358686	0.4	15 358694	2.5		
8 358687	0.5	16 358695	3.15		


technical data:
size ø5x20mm
rated voltage 250V
switch-off behavior medium lag
quantity 10 pcs

pos.	curr. (A)	pos.	curr. (A)	pos.	curr. (A)
1 358590	0.06	9 358703	0.4	17 358604	2.5
2 358591	0.08	10 358597	0.5	18 358605	3.15
3 358592	0.1	11 358598	0.63	19 358606	4
4 358593	0.13	12 358599	0.8	20 358609	5
5 358594	0.16	13 358600	1	21 358607	6.3
6 358595	0.2	14 358601	1.25	22 358704	8
7 358596	0.25	15 358602	1.6	23 358608	10
8 358702	0.32	16 358603	2	24 358706	16

technical data:
size ø5x20mm
size mm
rated voltage 250V
type
switch-off behavior slow-acting
quantity 10 pcs


pos.	curr. (A)	pos.	curr. (A)	pos.	curr. (A)
1 358795	0.1	8 358711	0.5	15 358717	2.5
2 358796	0.13	9 358801	0.63	16 358718	3.15
3 358797	0.16	10 358712	0.8	17 358719	4
4 358798	0.2	11 358713	1	18 358723	5
5 358799	0.25	12 358714	1.25	19 358720	6.3
6 358710	0.32	13 358715	1.6	20 358721	8
7 358800	0.4	14 358716	2	21 358722	10

technical data:
size ø5x30mm
rated voltage 500V
switch-off behavior fast-acting
quantity 10 pcs


technical data:
size ø5x30mm
rated voltage 500V
switch-off behavior medium lag
quantity 10 pcs

pos.	curr. (A)	pos.	curr. (A)	pos.	curr. (A)	
1	358802	0.1	8 358726	0.5	15 358732	2.5
2	358803	0.13	9 358808	0.63	16 358733	3.15
3	358804	0.16	10 358727	0.8	17 358734	4
4	358805	0.2	11 358728	1	18 358724	5
5	358806	0.25	12 358729	1.25	19 358735	6.3
6	358725	0.32	13 358730	1.6	20 358809	8
7	358807	0.4	14 358731	2	21 358736	10




technical data:
size ø6.3x32mm
rated voltage 500V
switch-off behavior fast-acting
quantity 10 pcs

pos.	curr. (A)	pos.	curr. (A)	pos.	curr. (A)	
1	358810	0.1	9 358816	0.63	17 358749	4
2	358811	0.13	10 358742	0.8	18 358750	5
3	358812	0.16	11 358743	1	19 358751	6.3
4	358813	0.2	12 358744	1.25	20 358817	8
5	358814	0.25	13 358745	1.6	21 358752	10
6	358740	0.32	14 358746	2	22 358753	16
7	358815	0.4	15 358747	2.5		
8	358741	0.5	16 358748	3.15		




technical data:
size ø6.3x32mm
switch-off behavior fast-acting
rated voltage 250V
quantity 1 pcs

pos.	curr. (A)	pos.	curr. (A)	
1	358154	10	3 358157	15
2	358156	12	4 358155	20




technical data:
size ø10x38mm
rated voltage 400V
type aM
switch-off behavior slow-acting
quantity 1 pcs

pos.	curr. (A)	pos.	curr. (A)	pos.	curr. (A)	
1	358041	20	2 358042	25	3 358030	32




technical data:
size ø6.3x32mm
rated voltage 250V
switch-off behavior medium lag
quantity 10 pcs

pos.	curr. (A)	pos.	curr. (A)	
1	358818	0.1	12 358764	1.25
2	358819	0.13	13 358765	1.6
3	358820	0.16	14 358766	2
4	358821	0.2	15 358767	2.5
5	358822	0.25	16 358768	3.15
6	358760	0.315	17 358769	4
7	358823	0.4	18 358770	5
8	358761	0.5	19 358771	6.3
9	358824	0.63	20 358825	8
10	358762	0.8	21 358772	10
11	358763	1	22 358773	16




technical data:
size ø10x38mm
switch-off behavior slow-acting
rated voltage 500V
type aM
quantity 1 pcs

pos.	curr. (A)	pos.	curr. (A)	pos.	curr. (A)	
1	358033	1	4 358036	6	7 358039	12
2	358034	2	5 358037	8	8 358040	16
3	358035	4	6 358038	10		




technical data:
size ø6.3x32mm
switch-off behavior slow-acting
rated voltage 250V
quantity 10 pcs

pos.	curr. (A)	pos.	curr. (A)	pos.	curr. (A)	
1	358826	0.1	9 358640	0.63	17 358789	4
2	358827	0.13	10 358782	0.8	18 358790	5
3	358828	0.16	11 358783	1	19 358791	6.3
4	358829	0.2	12 358784	1.25	20 358794	8
5	358830	0.25	13 358785	1.6	21 358792	10
6	358780	0.32	14 358786	2	22 358793	16
7	358831	0.4	15 358787	2.5	23 358639	20
8	358781	0.5	16 358788	3.15		



technical data:
size ø10x38mm
rated voltage 500V
switch-off behavior fast-acting
quantity 1 pcs

pos.	curr. (A)	type	pos.	curr. (A)	type	
1	358020	1	Gg	6 358031	10	Gg
2	358021	2	gl	7 358025	12	Gg
3	358022	4	Gg	8 358027	16	Gg
4	358023	6	Gg	9 358028	20	Gg
5	358024	8	gl	10 358032	25	Gg



technical data:
size ø10.4x38mm
switch-off behavior fast-acting
rated voltage 250V
type BLN
quantity 1 pcs

pos.	curr. (A)	pos.	curr. (A)	
1	358153	15	3 358151	25
2	358150	20	4 358152	30



technical data:
 size $\varnothing 10.4 \times 35(38)$ mm
 rated voltage 600V
 type ATMR/KTK-R
 switch-off behavior fast-acting
 quantity 1 pcs

pos.	curr. (A)	pos.	curr. (A)	pos.	curr. (A)	
1	358836	12	2	358837	20	
				3	358838	25

various



technical data:
 quantity 1 pcs

fig.	curr. (A)	fig.	curr. (A)		
1	358004	20	2	358397	25

fine fuse holders



fig.	suitable fuse	\varnothing (mm)	curr. (A)	rated (V)	connection	
1	550558	$\varnothing 5 \times 20$ mm	12.5	10	250	F4.8
1	358029	$\varnothing 5 \times 20$ mm	14.5	10	500	F6.3
1	358113	$\varnothing 5 \times 20$ mm	15	10	250	F2.8
1	358396	$\varnothing 5 \times 20$ mm	15	16	250	F4.8
1	358384	$\varnothing 5 \times 20$ mm	15.2	10	250	solder connection
1	551283	$\varnothing 6.3 \times 32$ mm	12.5	20	300	F4.8
1	358125	$\varnothing 6.3 \times 32$ mm	15	10	250	F4.8
1	358387	$\varnothing 6.3 \times 32$ mm	15.2	10	250	solder connection
1	358852	$\varnothing 6.3 \times 32$ mm	16	16	250	F4.8/F6.3
2	358383	$\varnothing 5 \times 20$ mm	13.1	10	250	solder connection
2	358835	$\varnothing 6.3 \times 32$ mm	14.5	30	600	F6.3
2	358388	$\varnothing 6.3 \times 32$ mm	15.2	15	250	F4.8
3	358535	$\varnothing 5 \times 20$ mm	25.2	30	600	F6.3



fig.	suitable fuse	curr. (A)	rated (V)	connection	
1	358382	$\varnothing 5 \times 30$ mm	10	250	screw connection

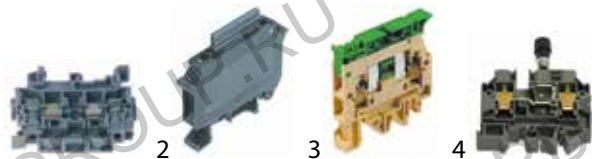


fig.	suitable fuse	curr. (A)	rated (V)	
1	358832	$\varnothing 5 \times 20$ mm	6.3	250
2	550468	$\varnothing 5 \times 20$ mm	6.3	600
3	551234	$\varnothing 5 \times 20$ mm	6.3	600
4	550105	$\varnothing 5 \times 20$ mm	10	250



fig.	suitable fuse	curr. (A)	rated (V)	
4	550406	$\varnothing 5 \times 30$ mm	10	250
4	550439	$\varnothing 6.3 \times 32$ mm	10	250
5	550104	$\varnothing 5 \times 30$ mm	10	600
5	550348	$\varnothing 6.3 \times 32$ mm	6.3	600
5	550669	$\varnothing 5 \times 25$ mm	10	600
6	358026	$\varnothing 6.3 \times 32$ mm	10	800
7	550983	$\varnothing 10 \times 38$ mm	30	600
8	550536	$\varnothing 10 \times 38$ mm	30	600



fig.	suitable fuse	curr. (A)	rated (V)	
9	358075	$\varnothing 10 \times 38$ mm	32	690
10	358096	$\varnothing 10 \times 38$ mm	32	690

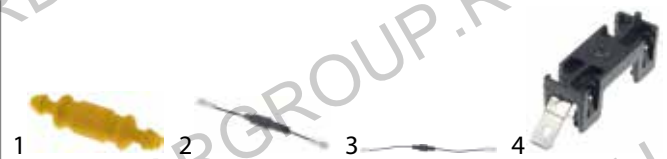


fig.	suitable fuse	\varnothing (mm)	curr. (A)	rated (V)	connection	
1	551282	$\varnothing 5 \times 20$ mm	12.5	30	32	8x5
2	358016	$\varnothing 5 \times 20$ mm	14	4	250	F6.3
3	358101	$\varnothing 5 \times 20$ mm	14	4	250	F6.3
4	504479	$\varnothing 5 \times 30$ mm	-	25	300	F6.3

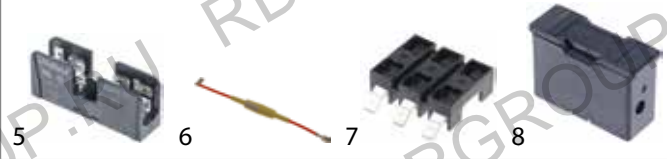


fig.	suitable fuse	\varnothing (mm)	curr. (A)	rated (V)	connection	
5	551268	$\varnothing 5 \times 30$ mm	-	30	600	F6.3x0.8
6	358834	$\varnothing 6.3 \times 32$ mm	15	0.8	5K	F6.3
7	504475	$\varnothing 6.3 \times 32$ mm	-	16	300	F6.3
8	551212	$\varnothing 6.3 \times 32$ mm	-	20	240	-



screw locks

D-system (DIAZED)



fig.	size	curr. (A)	rated (V)	thread	ø (mm)	Qty (pcs)	L (mm)	
1	358085	DI	6	500	E16	13	10	50
1	358086	DI	10	500	E16	13	10	50
1	358087	DI	16	500	E16	13	10	50
1	358088	DI	20	500	E16	13	10	50
1	358089	DI	25	500	E16	13	10	50
2	358080	DII	6	500	E27	22	5	50
2	358081	DII	10	500	E27	22	5	50
2	358082	DII	16	500	E27	22	5	50
2	358083	DII	20	500	E27	22	5	50
2	358084	DII	25	500	E27	22	5	50
3	358090	DIII	35	500	E33	27	5	50
3	358091	DIII	50	500	E33	27	5	50
3	358092	DIII	63	500	E33	27	5	50

D0-system (NEOZED)



fig.	size	curr. (A)	rated (V)	thread	ø (mm)	Qty (pcs)	L (mm)	
1	358070	D01	2	250/400	E14	11	10	36
1	358071	D01	4	250/400	E14	11	10	36
1	358072	D01	6	250/400	E14	11	10	36
1	358073	D01	10	250/400	E14	11	10	36
1	358077	D01	13	250/400	E14	11	1	36
1	358043	D01	16	250/400	E14	11	10	36
2	358048	D02	20	250/400	E18	15	10	36
2	358044	D02	25	250/400	E18	15	10	36
2	358078	D02	32	250/400	E18	15	1	36
2	358045	D02	35	250/400	E18	15	10	36
2	358079	D02	40	250/400	E18	15	1	36
2	358046	D02	50	250/400	E18	15	10	36
2	358047	D02	63	250/400	E18	15	10	36

gauge pieces (NEOZED)



pos.	size	suitable for	pos.	GEV No.	size	suitable for	
1	358052	D01	2A	6	358069	D02	4A
2	358053	D01	4A	7	358076	D02	6A
3	358054	D01	6A	8	358063	D02	10A
4	358055	D01	10A	9	358064	D02	16A
5	358056	D02	2A				

pos.	size	suitable for	pos.	size	suitable for		
10	358065	D02	20A	12	358067	D02	35A
11	358066	D02	25A	13	358068	D02	50A

fuse holders



fig.	description	suitable fuse	curr. (A)	rated (V)	
1	358093	fuse holder	D01	16	400
1	358094	fuse holder	D02	63	400
2	358057	fuse holder	D01	16	400
2	358058	fuse holder	D02	63	400
3	358062	fuse holder	D01	63	400
3	358060	fuse holder	D02	63	400
4	358059	fuse holder	D01	16	400
4	358061	fuse holder	D02		400

thermal fuses



fig.	SOT (°C)	nominal (A)	fig.	SOT (°C)	nominal (A)		
1	358294	84	10	1	358139	142	15
1	358301	98	10	1	358300	152	10
1	358295	104	10	1	358302	167	10
1	358296	109	10	1	358303	184	10
1	358095	110	10	1	358304	192	10
1	358297	117	10	1	358305	216	10
1	358298	128	10	1	358306	228	10
1	358299	141	10	1	358307	240	10



fig.	SOT (°C)	type	fig.	SOT (°C)	type		
1	358165	104	G5AP1100	1	358164	128	G5AP1102
1	358166	104	G5AP1101				

micro fuses



fig.	rated (mA)	rated (V)	fig.	rated (mA)	rated (V)		
1	358050	50	250	2	358051	100	250

31 fuses



HV fuses




fig.	curr. (A)	switch-off behavior	rated (V)	Qty (pcs)
1 358169	0.8	slow-acting	5000	1
1 358171	0.9	slow-acting	5000	1
2 358170	1	slow-acting	5000	1
3 358172	1	slow-acting	5000	1

overload switches




fig.	drop-away current (A)	fig.	drop-away current (A)
1 358519	0.05	1 358014	5
1 358127	0.8	2 358524	0.05
1 358522	1.5	3 358523	0.6
1 358515	2.5	4 358514	0.8
1 358013	3	4 358516	2



fig.	drop-away current (A)	fig.	drop-away current (A)
5 358513	1	7 358179	4
5 358520	2.5	8 358100	15
6 358137	4		

line circuit breakers

ABL SURSUM



fig.	number of poles	TrTy	curr. (A)	rated (V)
1 358103	1-pole	B	10	240/415
1 358104	1-pole	B	16	240/415
1 358105	1-pole	B	20	240/415
1 358106	1-pole	B	25	240/415
1 358107	1-pole	B	32	240/415
1 358108	1-pole	B	40	240/415
1 380616	1-pole	C	10	240/415
1 345259	1-pole	C	20	240/415
1 358120	1-pole	C	20	240/415
1 358121	1-pole	C	25	240/415
1 358210	1-pole	K	4	240/415
1 358212	1-pole	K	6	240/415
1 358214	1-pole	K	10	240/415



fig.	number of poles	TrTy	curr. (A)	rated (V)
1 358216	1-pole	K	16	240/415
1 358217	1-pole	K	20	240/415
1 358218	1-pole	K	25	240/415
1 358219	1-pole	K	32	240/415
1 358220	1-pole	K	40	240/415
2 345530	1-pole+N	K	16	240
2 345531	1-pole+N	K	16	240
2 345532	1-pole+N	K	25	240
2 345533	1-pole+N	K	32	240
2 345534	1-pole+N	K	40	240
3 358230	3-pole	K	16	400
3 358231	3-pole	K	20	400
3 358232	3-pole	K	25	400
3 358233	3-pole	K	32	400
3 358234	3-pole	K	40	400
4 345540	3-pole+N	K	16	400
4 345541	3-pole+N	K	20	400
4 345542	3-pole+N	K	25	400
4 345543	3-pole+N	K	32	400
4 345544	3-pole+N	K	40	400

miscellaneous




fig.	number of poles	TrTy	curr. (A)	rated (V)
1 381233	1-pole	D	6	230/400
2 358114	3-pole	C	6	400
3 358146	3-pole	C	16	400
4 358145	3-pole	C	32	400




fig.	number of poles	TrTy	curr. (A)	rated (V)
5 358126	3-pole	C	80	400
6 381232	3-pole	D	6	400